

# StrazPack<sup>®</sup>

For Seafood and Meat Packing Industries



## AQ-7M

# AQ-7M

Side-Seal Model for Seafood and Meat Packing Industries



■ **FAST!**

Minimum of 30 cycles per minute (2.0 seconds per cycle) which is 15% faster than the previous model (SS-80MD). The AQ-7M provides the speed and dependability seafood and meat processors need in their packaging lines.

■ **MOISTURE PROTECTION**

With a stainless steel body and parts made of water-resistant materials such as stainless steel and aluminum, the AQ-7M defies rust and corrosion even in harsh environments. This moisture protection is reinforced at the bottom of the body which has greater exposure to moisture than other parts of the machine.

■ **BUILT TO LAST**

Permanently lubricated mechanisms, side-seal design and a fully enclosed cabinet protect the machine from salt-water runoff, oil and dust.

■ **QUICK WARM-UP HEATER**

Only 25 seconds required to reach operating temperature.

■ **EASY TENSION CONTROL**


Tension is adjustable via a conveniently positioned dial. Consistent tensioning is provided by a tension arm system.

■ **PORTABLE**

Reduced body weight of 200kg (440lbs.) increases portability. Table height is adjustable to three positions [624mm, 642mm, 664mm (24-9/16", 25-5/16", 26-1/8")].

■ **NEW ARCH SYSTEM**

Newly designed arch system ensures more precise strap positioning and reduces strap twisting. AQ-7M can be supplied to operate on a wide variety of strap thickness and strap widths ranging from 5mm to 19mm (5/8").

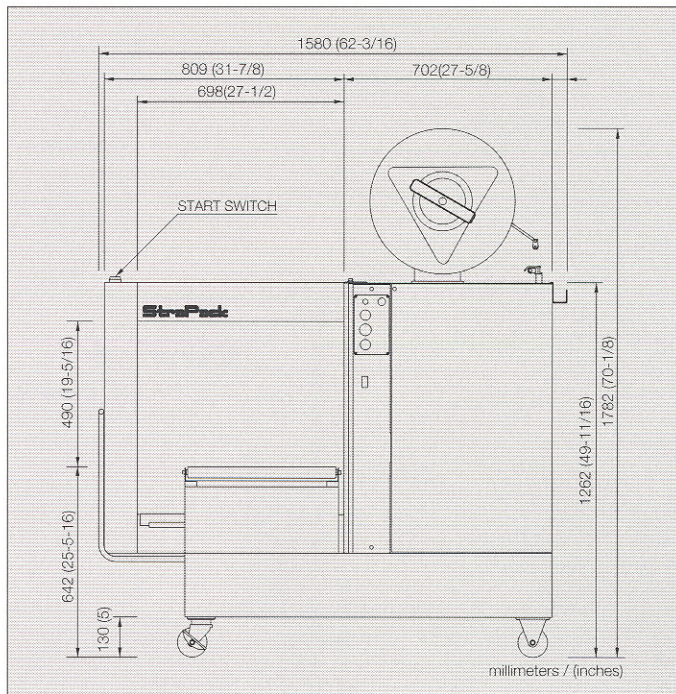

■ **Standard Specifications**

|                      |        |  |   |
|----------------------|--------|--|---|
| Dimensions           | Width  | 1580mm   | 62-3/16 in.   |
|                      | Height | 1782mm   | 70-1/8 in.  |
|                      | Depth  | 610mm  | 24 in.  |
|                      | Weight | 200kg  | 440 lbs.  |
| Table Height         |        | 624, 642, or 664mm                                       | 24-9/16, 25-5/16, 26-1/8 in.                          |
| Arch Size            |        | W 700 × H 650mm  | W 27-1/2 × H 25 in                                    |
| Package Size         | Max    | W 680 × H 500mm  | W 26-11/16 × H 19-11/16 in.                           |
|                      | Min    | W 30 × H 80mm  | W 1-1/4 × H 3-1/8 in.                                 |
| Joint / Strap / Coil |        | heat seal / polypropylene /<br>ID 200 × OD 450 × W 200mm | heat seal / polypropylene /<br>ID 8 × OD 18 × W 8 in. |
| Strap Width          |        | 5, 6, 9, 12, 15.5mm                                      | 1/4, 3/8, 1/2, 5/8 in.                                |
| Strap Tension        |        | Max. 120kg 62mm stroke                                   | Max. 264 lbs. 2-7/16 in. stroke                       |
| Strapping Rate       |        | 2.0 seconds  |   |
| Power Supply         |        | 200, 220, 240, 380, 400, 415V 3 phase 50 / 60Hz 0.85KVA  |   |

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 1998 Strapack Corporation

**DISTRIBUTED BY:**

**STRAPACK CORPORATION**

1-2-17, Higashi Shinbashi, Minato-ku, Tokyo 105-0021, JAPAN  
Phone 81-3-3289-1161 Fax. 81-3-3289-1160  
(URL) <http://www.strapack.com>  
(E-mail) [info@strapack.com](mailto:info@strapack.com)

**STRAPACK INC.**

30860 San Clemente St. Hayward, CA 94544 U.S.A.  
Phone 1-510-475-6000 Fax. 1-510-475-6090