


Strapack[®]

Compact Model for Printing Industry



RQ-8IR2

RQ-8IR2

Compact Model Ideal for Office or Printing Applications 

■ COMPACT!

Space-efficient design with internal reel unit utilizing a standard size strap coil.

■ VERY FAST!

1.5 seconds per strap (approximately 40 straps per minute).

■ RE-FEED FUNCTION

Features automatic resetting of the machine for continuous operation even if a strap forwarding failure were to occur.

■ SINGLE PHASE

Easy installation and operation with common household power supply.

■ VARIABLE TENSION

A single dial provides a wide range of tension for all packages.

■ QUICK WARM-UP HEATER

Only 25 seconds required to reach operating temperature. Strap cycle cannot be initiated until heater warms up to operating temperature.

■ EMPTY STRAP COIL DETECTION

Operation automatically stops when the strap coil is empty plus an optional warning signal is available. Easy removal of any excess strap ensures uninterrupted operation.

■ AUTOMATIC STRAP EJECTION

An empty strap loop is automatically ejected when a strapping cycle is accidentally activated without a package in place.

■ SELF-DIAGNOSTIC MECHANISM


A programmable microprocessor constantly monitors critical functions - any irregularity detected is immediately displayed.

■ PRECISE STRAP PLACEMENT

Newly designed bandway offers accurate strap positioning without twists or misaligned joints.

■ IMPROVED ARCH CONFIGURATION

New arch configuration accommodates U.S. Mail trays with 690mm (27") opening.

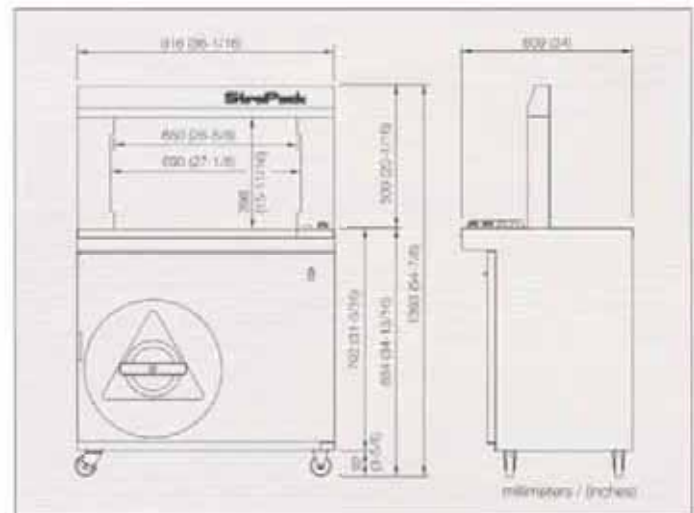

■ Standard Specifications

Dimensions	Width	916mm	36-1/16 in.
	Height	1393mm	54-7/8 in.
	Depth	609mm	24 in.
	Weight	168kg	370 lbs.
Table Height		884mm	34-7/8 in.
Arch Size		W 890 × H 400mm	W 27-1/8 × H 16 in.
Package Size	Max	W 620 × H 380mm	W 24-7/16 × H 15 in.
	Min	W 80 × H 30mm	W 3-1/8 × H 1-3/16 in.
Joint / Strap / Coil		heat seal / polypropylene / ID 200 × OD 450 × W 200mm	heat seal / polypropylene / ID 8 × OD 18 × W 8 in.
Strap Width		5, 6, 9, 12mm	1/4, 3/8, 1/2 in.
Strap Tension		Max. 80kg 150mm stroke	Max. 176 lbs. 6 in. stroke
Speed		1.5 sec. / strap 40 straps per min.	
Power Supply		100, 110, 200, 220V 1 phase 50 / 60Hz 0.65KVA	

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2000 Strapack Corporation

DISTRIBUTED BY:



Boatman Marking, Inc.

2553 Lee Avenue

So. El Monte, CA 91733

Ph (626) 285-1802 Fax (626) 350-8045

www.BoatmanMarking.com